USER MANUAL

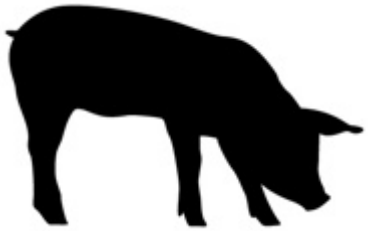

TED

Captive Bolt Stunner

bock industries, inc.

WWW.TEDSTUNNER.COM
814-342-4385

v8

This tool is for animal euthanasia.

Authorized Users Only

ALWAYS point in a safe direction.

When TED Arrives... Immediately

Safety First!

INSPECTION

1. **Read this User Manual.**

2. **Charge the Batteries.**

3. **Purchase Fuel, Oil (Paslode) and Spray Oil (Triflow)**

Note the packed location of the components

Safety First!

INSPECTION

AC
120v
Adapter

Safety Glasses
Recommended

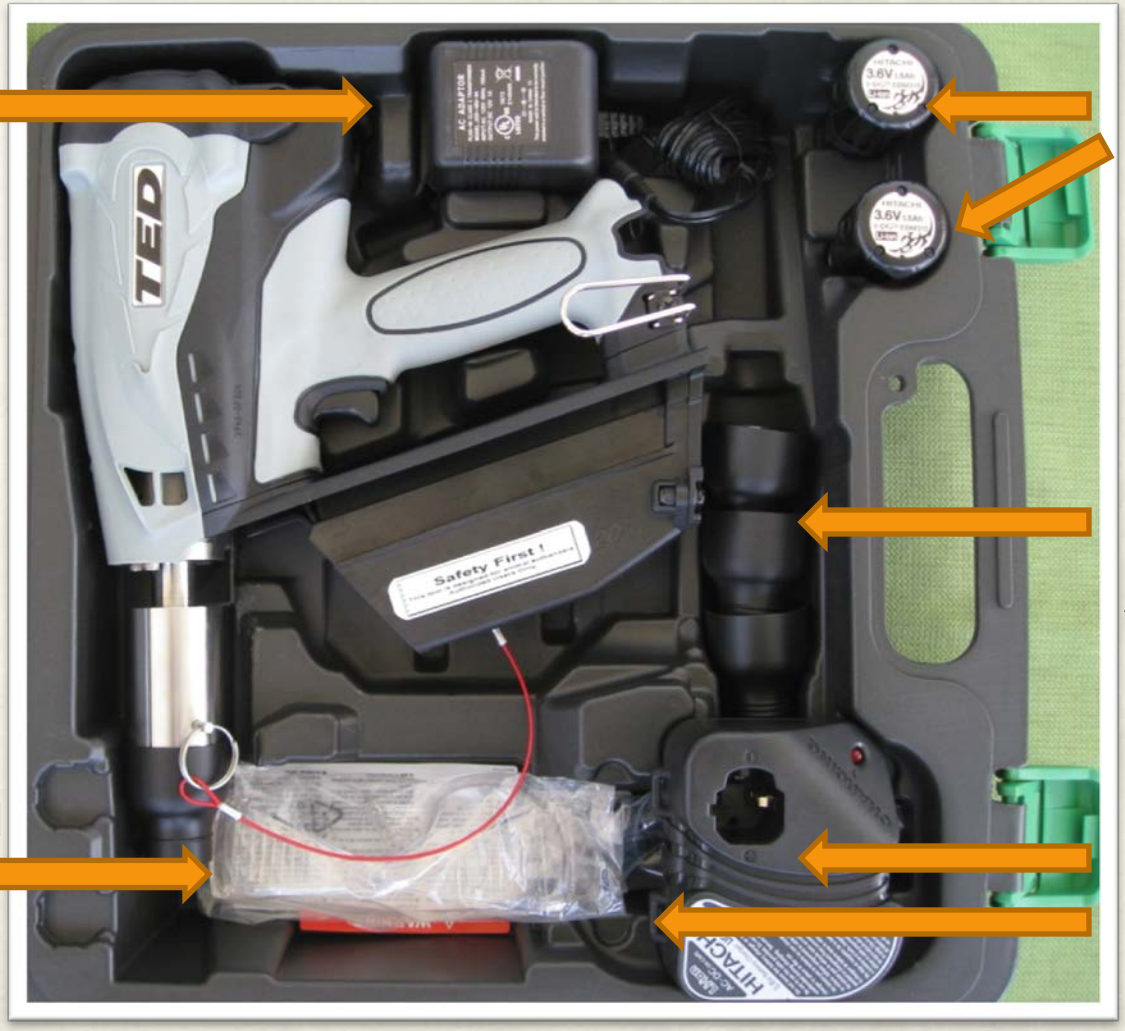

Batteries
(Charge before use)

Subject
Adapters

Charger Base

DC
12v
Adapter

Read the Hitachi manual

Safety First!

INSPECTION

TED with Safety Pin in place

Safety First!

INSPECTION

Trigger

LED
- Green: ready
- Red: charge battery

Safety Pin

Activator

Subject Adapter

Safety Pin mechanically locks TED

Safety First!

INSPECTION

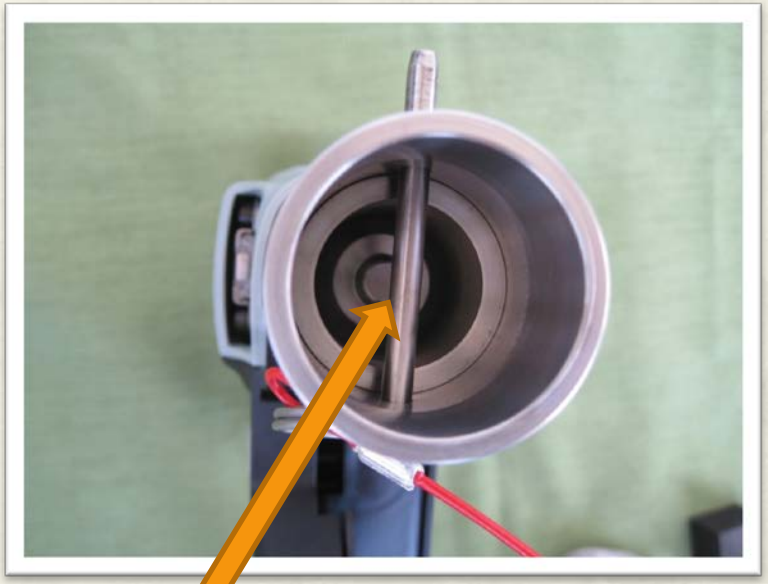

Safety Pin

Restricts movement of the Activator

Safety Pin stored in TED

Safety First!

INSPECTION

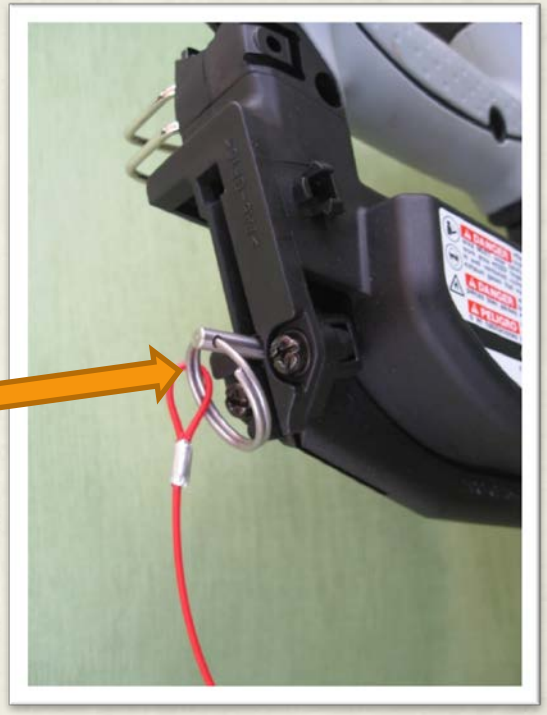

Subject Adapter determines Bolt Travel

Safety First!

SET UP

Subject Adapter must always be used!

- Subject Adapter #1 max bolt travel
- Subject Adapter #2 will decrease bolt travel by 1/8”
- Subject Adapter #3 will decrease bolt travel by 1/4”

Push Subject Adapter onto Activator over o-ring

Safety First!

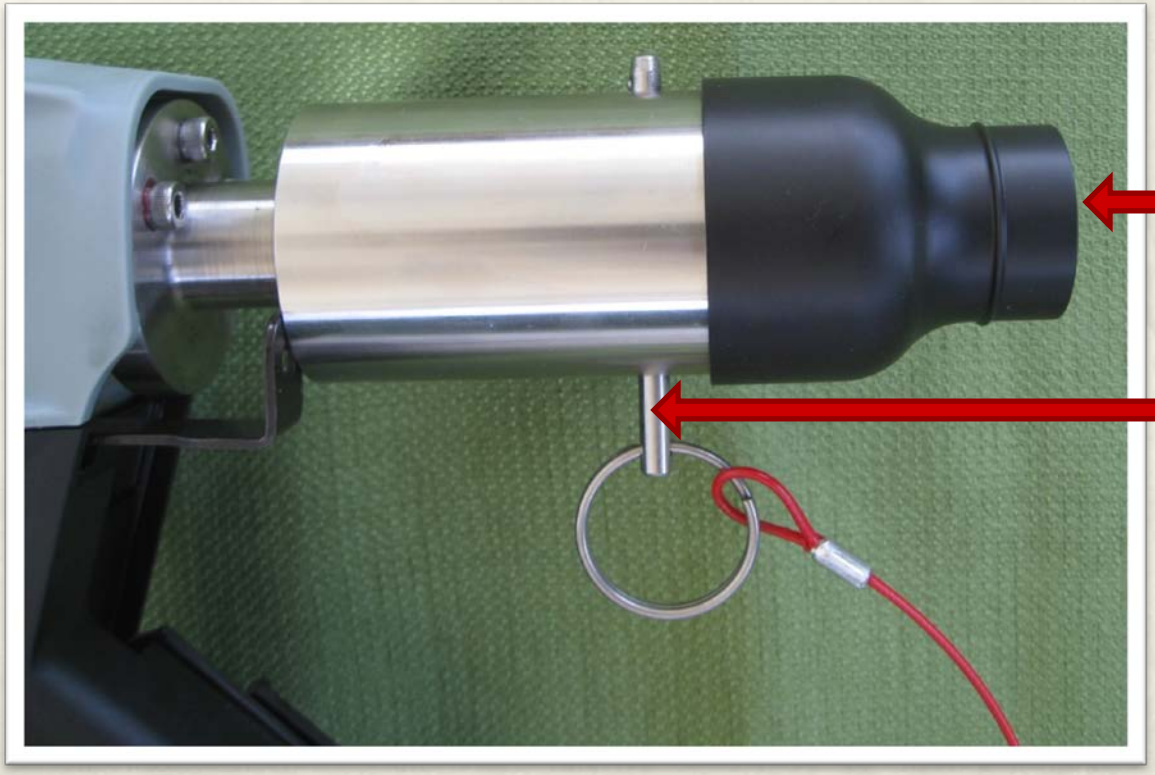

SET UP

Snap metering valve onto *new* canister

Safety First!

SET UP

- Once snapped down, do not attempt to remove metering valve.
- Metering valve remains snapped down for the life of the canister.
- Canister provides 1000 stuns (approx.)
- Label canister and record the number of stuns.

White nozzle slides & snaps into black receiver

Safety First!

SET UP

Paslode® TRIM FUEL
2-Step Valve!
IMPORTANT- Please read valve Installation Instructions before placing fuel cell into tool.

Batteries and charging equipment

Safety First!

SET UP

- Green LED: ready
- Red LED: charge battery

Oil Captive Bolt

Safety First!

SET UP

1. **Spray recommended oil in Vent Port.**

2. **Spray two, 1 second bursts.**

Ensure fuel system is primed



Safety First!

- The TED may NOT fire on the first attempt, immediately after loading the fuel canister. This is NORMAL.
- Prime the fuel delivery by dry firing the TED several times.

SET UP

1. Install fuel canister and battery.
2. Remove Safety Pin from Activator.
3. Press Subject Adapter on a scrap cardboard box.
4. Listen for internal fan start-up.
5. Squeeze trigger.
6. Repeat from step 3, several times to confirm operation.

LED

Target subject

Safety First!

- An “X” is made from the base of the ear to the inside of the eye.
- Note closed wound shown.

USE

1. Remove Safety Pin from Activator (& store).

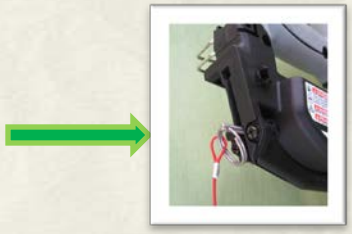

2. Locate TED on subject as shown.
3. Push TED until Activator contacts cap screws.
4. **<u>Immediately</u> squeeze trigger.**

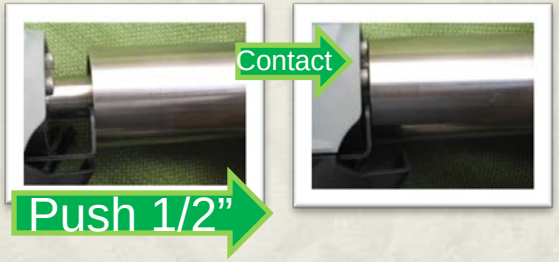

< 1 second

- Remove TED from subject to allow for recycle.
  - Note: Activator resets, audible fan vents combustion chamber.
- TED is reset and immediately ready for the next stun.

If bolt does not fully cycle use Locating Pin

Safety First!

USE

- The bolt must be fully retracted for the TED to fire.
- During shipping or transport the bolt may be jolted from the starting position.
- Use the Locating Pin to gently push the bolt into the starting position. Note resistance when starting position is reached.

Daily clean up recommended

Safety First!

MAINTENANCE

1. Remove battery and fuel canister.
2. Wipe stunner with disinfectant.
3. Apply several drops of light oil to inside of Activator.
4. Cycle Activator to confirm smooth operation.
5. Insert Safety Pin in Activator.
6. Confirm Locating Pin is stored in stunner.
7. Return all components to case.
8. Lock case.

Deep cleaning TED

Safety First!

MAINTENANCE

1. **The recycling bolt may draw contamination into TED.**
2. **Locate the small vent port shown below.**

3. **Spray disinfectant in this port.**
4. **“Dry fire” TED to force disinfectant past internal components.**
5. **Repeat**

Exposing bolt for cleaning

Safety First!

MAINTENANCE

1. Ensure the battery and fuel canister are removed.

2. Remove Subject Adapter from Activator.

3. Descend bolt by forcefully shaking TED in direction of bolt travel.
4. Repeat shaking until bolt is visible.
5. Clean and disinfect the exposed bolt.
6. Use Locating Pin to return bolt into starting position.

Safety interlocks

Safety First!

MAINTENANCE

1. Bolt fully retracted (use Locating Pin).

2. Fuel canister snapped in place (confirm sufficient level).
3. Battery snapped in place (confirm sufficient charge).
4. Safety Pin removed from Activator.
5. Activator fully depressed.

6. Confirm green LED.

Compatible Fuel: Paslode preferred

Safety First!

MAINTENANCE

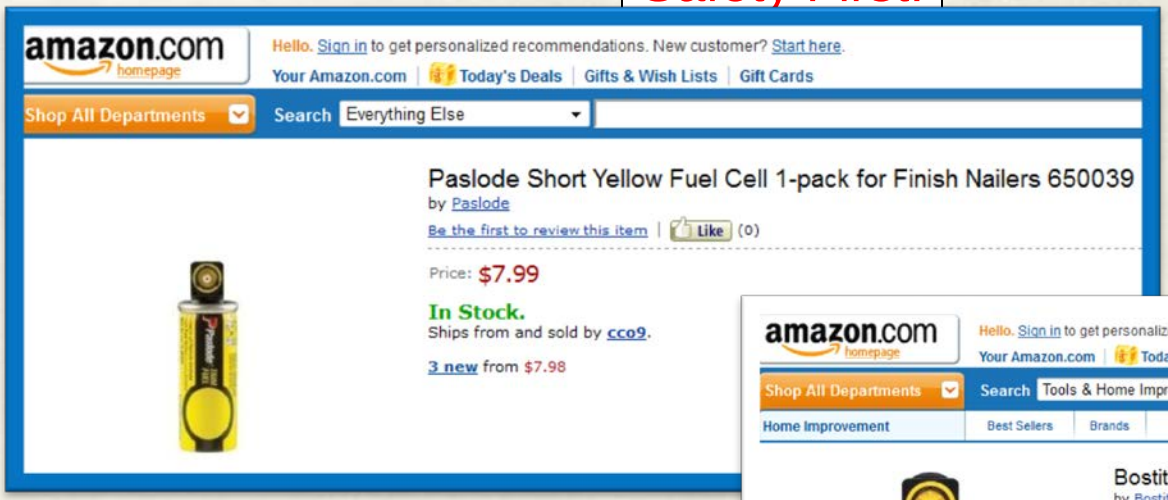
amazon.com
homepage
Hello. Sign in to get personalized recommendations. New customer? Start here.
Your Amazon.com | Today's Deals | Gifts & Wish Lists | Gift Cards
Shop All Departments
Search Everything Else
Paslode Short Yellow Fuel Cell 1-pack for Finish Nailers 650039
by Paslode
Be the first to review this item | Like (0)
Price: $7.99
In Stock.
Ships from and sold by cco9.
3 new from $7.98

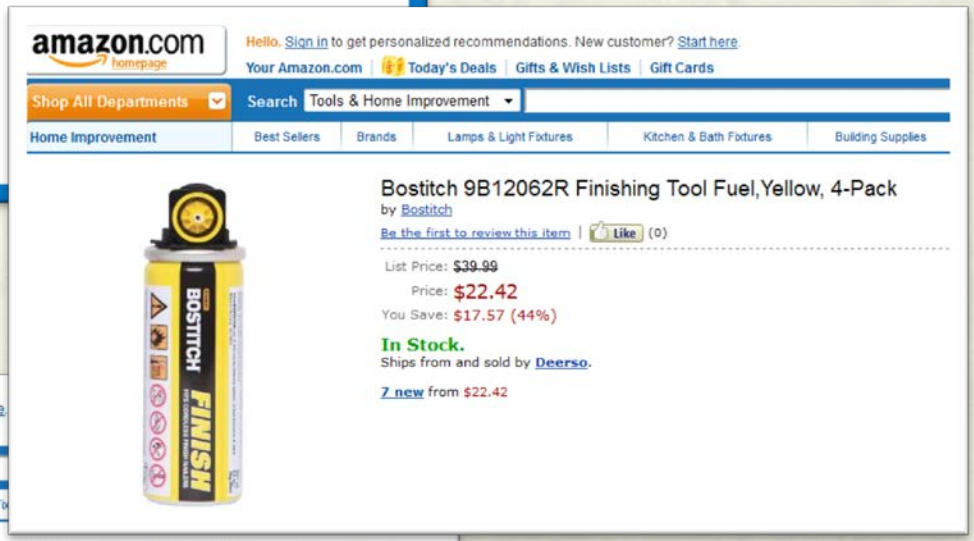
amazon.com
homepage
Hello. Sign in to get personalized recommendations. New customer? Start here.
Your Amazon.com | Today's Deals | Gifts & Wish Lists | Gift Cards
Shop All Departments
Search Tools & Home Improvement
Home Improvement
Best Sellers
Brands
Lamps & Light Fixtures
Kitchen & Bath Fixtures
Building Supplies
Bostitch 9B12062R Finishing Tool Fuel,Yellow, 4-Pack
by Bostitch
Be the first to review this item | Like (0)
List Price: $39.99
Price: $22.42
You Save: $17.57 (44%)
In Stock.
Ships from and sold by Deerso.
7 new from $22.42

amazon.com
homepage
Hello. Sign in to get personalized recommendations. New customer? Start here.
Your Amazon.com | Today's Deals | Gifts & Wish Lists | Gift Cards
Shop All Departments
Search Tools & Home Improvement
Home Improvement
Best Sellers
Brands
Lamps & Light Fixtures
Hitachi 728981 0.6-oz Short Fuel Rod / Cell for Gas Finish Nailers - 4 per Package
by Hitachi
Be the first to review this item | Like (0)
Price: $32.95
In Stock.
Ships from and sold by Quality Distributing LLC.
Only 4 left in stock--order soon.
3 new from $32.95

Compatible Oil

Safety First!

MAINTENANCE